

# QPOWER

## Petrol/Diesel Driven 2" Water Pumps and 3" Semi Trash Pumps



2" Water

Petrol



2" Water


Diesel



Petrol

3" Semi Trash

Packaged self priming centrifugal water pumps featuring single cylinder, forced air cooled, petrol engines running on unleaded fuel. Also 2" diesel model. Units are mounted on anti-vibration rubber feet and housed within a protective tube steel carry frame. Supplied with BSP threaded suction and discharge c/w hosetail fittings. A low oil level cut-out device is standard on all petrol models. Pumps have cast aluminium housings and feature mechanical seal, cast iron impeller, and flap valve on suction side for wet prime. The semi trash pumps feature quick release fastenings for inspection and blockage removal.

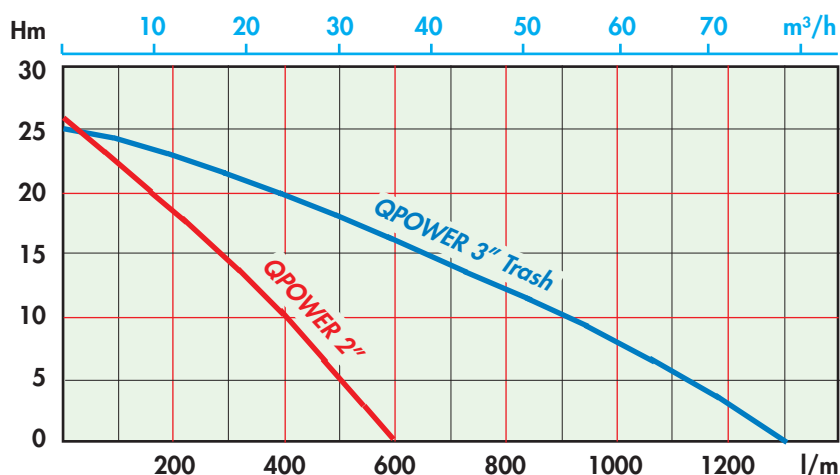

### MOTOR TECHNICAL DATA

MODEL	Motor Type	Motor cc	Max Output HP/rpm	Fuel Volume	Start Method
2" Petrol	WG160	163	5.5/3600	3.6 L	Recoil
2" Diesel	WH170FP2	211	4.2/3600	2.5 L	Elect/Recoil
3" Semi Trash	WG200	200	6.7/3600	3.6 L	Recoil

### PUMP TECHNICAL DATA

MODEL	Max Capacity l/m	Max Head m	Max Suction m	Suction/ Priming Time	Package Dim. mm L x W x H	Package Weight Kg
QPOWER 2" Petrol	600	26	8	40sec/5m	520x405x465	28
QPOWER 2" Diesel	600	26	8	40sec/5m	545x425x535	37
QPOWER 3" Semi Trash	1300	25	4	50sec/5m	520x405x465	54

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

