

TELLARINI SERIES ECC JET

12/24V STAINLESS STEEL JET PUMPS



Self priming centrifugal jet pumps



- Capacities from 10 to 60 l/min.
- Max head 36m.
- Max suction 8m.
- 12 and 24V DC models - IP23
- Suitable for clean water applications up to 45°C

MATERIAL SPECIFICATION

- Pump body and shaft
: Stainless steel AISI 304
- Impeller/Diffuser: Noryl

SEAL

- Mechanical seal:
Ceramic/Graphite/NBR

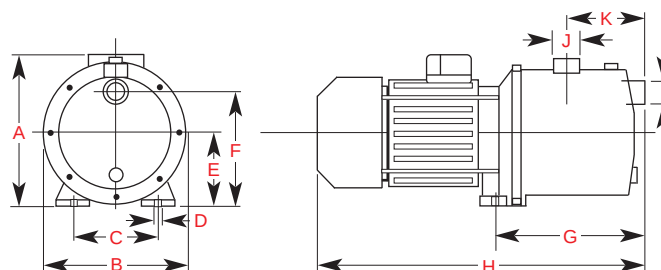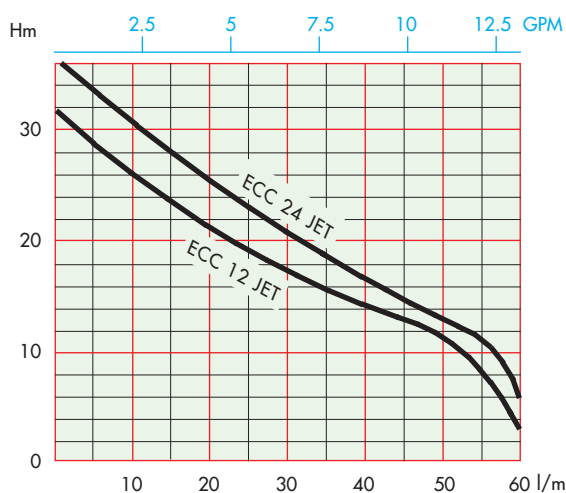

DIMENSIONS

TYPE	A	B	C	D	E	MM F	G	H	I	J	K
ECC 12 JET	190	170	100	7	90	125	195	409	1"G	1"G	90
ECC 24 JET	190	170	100	7	90	125	195	409	1"G	1"G	90

TECHNICAL DATA

TYPE	HP	MAX. AMP	RPM	CONNECTIONS FEMALE THREAD	1m	10m	15m	20m	25m	30m	WEIGHT Kg
ECC 12 JET	0.7	35	2650	1"	61	53	37	23	11	2	7.9
ECC 24 JET	0.7	19	2700	1"	61	56	44	32	20	11	7.9

© Descriptions, technical data and features contained in this leaflet are not binding. We reserve the right to make any necessary modifications without prior notice.

